


UNIA Max T Combinator - Panagroteh Grup

Descriere

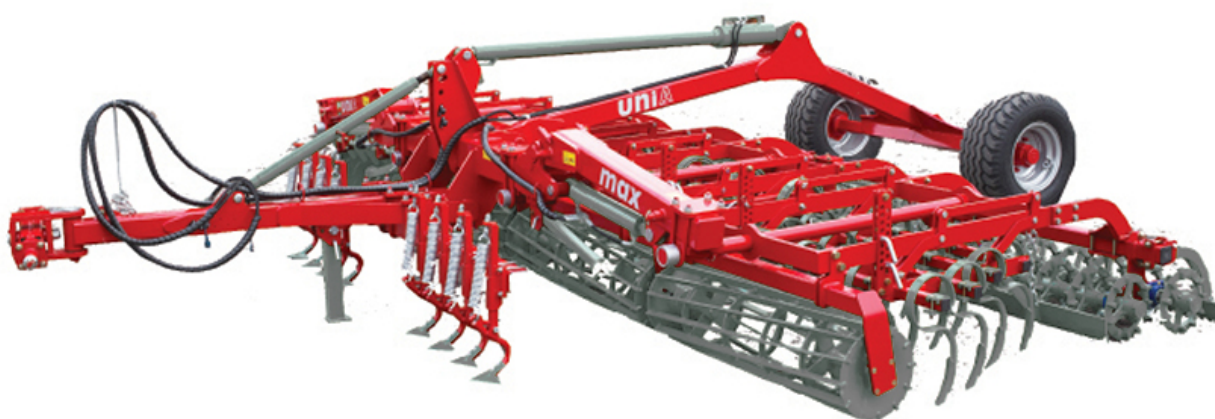

Echipament standard

- Ax suspensie: $\varnothing$ 60-825/ $\varnothing$ 28 mm (Versiune 3m)
- Ax suspensie: $\varnothing$ 60-825/ $\varnothing$ 36 mm (Versiune 4H)
- Ax suspensie: $\varnothing$ 70-825/ $\varnothing$ 36 mm (Versiune 4,5H- 9H)
- Bara nivelatoare dupa sectiunile de discuri
- Tavalug spate lamelar Dublu String Roller $\varnothing$ 320mm/280mm
- Cadru rigid (Versiune 3m)
- Cadru pliabil hidraulic (Versiune 4H-9H)
- Sistem control presiune pe toate sectiunile
- Bara nivelatoare dintata spate (doar cu tavalug spate Dublu Crosskill/Crosskill)

Echipament optional

- Tavalug spate Spiral Roller ø470mm
- Tavalug spate dublu Crosskill ø320/320 mm
- Sasiu cu roti 480/45-17 si protap 2100 mm (9H)
- Scormonitori urme tractor (doar varaiaanta cu sasiu)
- Ax suspensie: ø 60-825/ø 36 mm (3-4H)
- Ax suspensie: ø 70-960/ø 36 mm (4.5 H - 9H)
- Placuta avertizare cu sistem iluminat

Date tehnice

Date tehnice

MAX T	3	4H	4.5H	6H	7,5H	9H
Greutate fara tavalug (KG)	1650	2200	2400	3100	5500	6400
Numar discuri	24	30	36	48	60	72

Imagini



